


AF1230 Series Pumps

30:1 Ratio, 12" Air Motor, Chop-Check Lower End

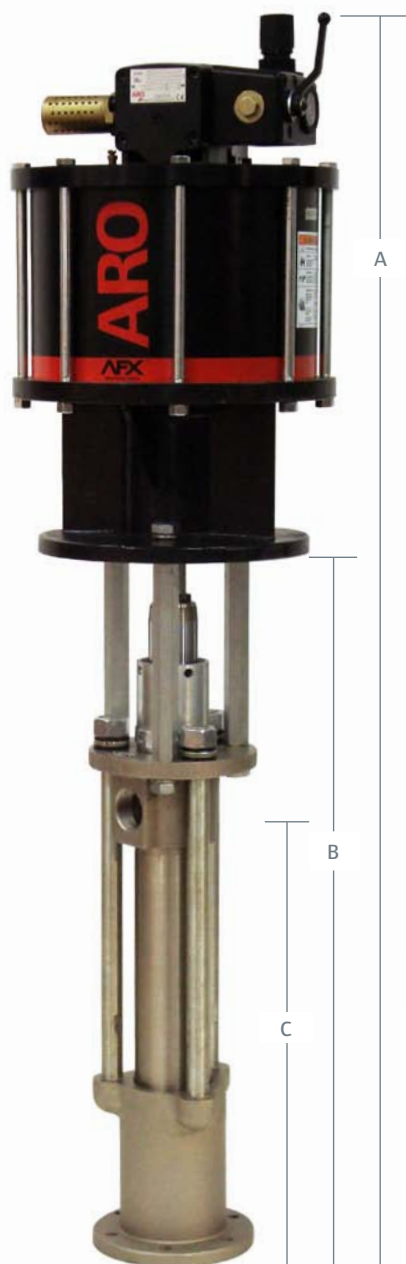

(Model shown w/ball valve regulator)

Pump Specifications

Ratio	30:1
Stroke (double acting)	6" (15.24 cm)
Material Inlet	Bolted Flange
Material Outlet	1-1/2" NPT(F)
Air Inlet (female)	3/4" NPT(F)
Air Inlet Pressure Range psi (bar)	30 - 90 (2.1 - 6.2)
Fluid Pressure Range psi (bar)	900 - 3250 (62.1 - 224.1)
Max Cycles/Minute	70
Displacement/Cycle cu in (cm3)	40.4 (662.0)
Cycles/gal (L)	5.7 (1.5)
Flow @ 70 Cycles gpm (L/min)	12.2 (46.3)
Noise Level @ 60 psi dBA	93
Weight lb (kg)	78 (35.42)
Container Suitability	Remote Mounting



Transfer and Supply



Extrusion

Materials

Caulking Inks	Mastics Heavy Lubricants	Sealants
------------------	-----------------------------	----------



Chop-Check Lower End Style

- Capable of moving medium-to high-viscosity fluids ranging from 15,000 to more than 1,000,000 cPs.
- Material delivery rates up to 12.2 gpm (46.3 L/min)

Pump Model*	Plunger Material	Upper Packings	Lower Packings	Lower Pump Model	Pump Service Kit
Lower Pump Model Material - Carbon Steel, Nickel Plated					
AF1230S11FF44	Carbon Steel w/Hard Chrome	UHMW-PE	UHMW-PE	66236-C4E-B	637128-C44-B
AF1230S11HF44	Carbon Steel w/Hard Chrome	UHMW-PE/Leather (Staggered)	UHMW-PE	66236-F4E-B	637128-F44-B
AF1230S11PF14	Carbon Steel w/Hard Chrome	Polyurethane	UHMW-PE	66236-J3E-B	637128-J34-B

*Add "-1" to Model No. for Ball Valve Regulator

RECOMMENDED ACCESSORIES



67445-5
Muffler Kit



66334-B
Wet-Sol Packing
Lubricant



23644-400
ARO-Stop
Valve



65139
Floor Mount



67442
Ball Valve
Regulator



637489
Universal Air Motor
Service Kit

DIMENSIONS

A ¹ in (mm)	54.43 (1382.47)
B in (mm)	31.34 (796.11)
C in (mm)	19.94 (506.40)

¹ For models without ball valve regulator subtract 2.08 in (52.83 mm)

airpumping.co.uk

est. 1979

Unit 16, Upminster Trading Park, Warley St, Upminster, Essex, RM14 3PJ, ENGLAND

ARO

IR Ingersoll Rand
Industrial Technologies