


AF1265 Series Pumps

65:1 Ratio, 12" Air Motor, Chop-Check Lower End

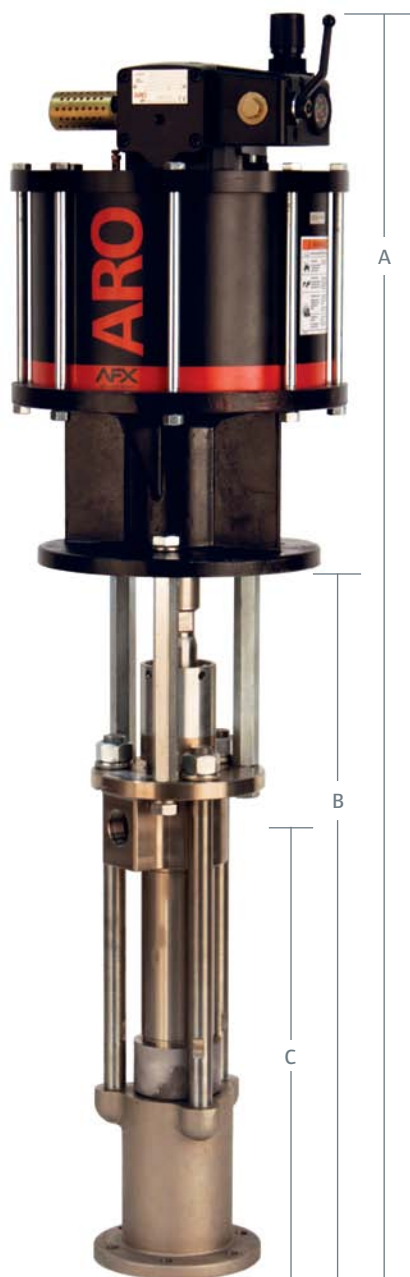

(Model shown w/ball valve regulator)

Pump Specifications

Ratio	65:1
Stroke (double acting)	6" (15.24 cm)
Material Inlet	Flange Mount
Material Outlet	1-1/4" NPT(F)
Air Inlet (female)	3/4" NPT(F)
Air Inlet Pressure Range psi (bar)	30 - 90 (2.1 - 6.2)
Fluid Pressure Range psi (bar)	1950 - 5850 (134.5 - 403.4)
Max Cycles/Minute	70
Displacement/Cycle cu in (cm ³)	20.0 (327.8)
Cycles/gal (L)	11.5 (3.0)
Flow @ 70 Cycles gpm (L/min)	6.0 (22.9)
Noise Level @ 60 psi dBA	93
Weight* lb (kg)	165 (74.8)
Container Suitability	Remote Mounting

*Estimated weight. Contact Technical Support for exact weight.



Transfer and Supply



Extrusion

Materials

Caulking Inks	Mastics Heavy Lubricants	Sealants
------------------	-----------------------------	----------



Chop-Check Lower End Style

- Capable of moving medium-to high-viscosity fluids ranging from 15,000 to more than 1,000,000 cPs.
- Material delivery rates up to 12.2 gpm (46.3 L/min)

Pump Model**	Plunger Material	Upper Packings	Lower Packings	Lower Pump Model	Pump Service Kit
Lower Pump Model Material - Carbon Steel, Nickel Plated					
AF1265S11PF17	17-4 Stainless Steel w/Hard Chrome	Polyurethane	UHMW-PE	67300-J3D	637348-J3D
AF1265S11FF47	17-4 Stainless Steel w/Hard Chrome	UHMW-PE	UHMW-PE	67300-C4D	637348-C4D

**Add "-1" to Model No. for Ball Valve Regulator

RECOMMENDED ACCESSORIES



67445-5
Muffler Kit



66334-B
Wet-Sol Packing
Lubricant



23644-400
ARO-Stop
Valve



65139
Floor Mount



67442
Ball Valve
Regulator



637489
Universal Air Motor
Service Kit

DIMENSIONS

A ¹ in (mm)	53.46 (1357.88)
B in (mm)	30.38 (771.65)
C in (mm)	19.25 (488.95)

¹For models without ball valve regulator subtract 2.08 in (52.83 mm)

airpumping.co.uk

est. 1979

Unit 16, Upminster Trading Park, Warley St, Upminster, Essex, RM14 3PJ, ENGLAND

ARO

IR Ingersoll Rand
Industrial Technologies

65:1 Ratio Pump Packages



TPX Series
Two Post Ram

Packages						
Model No.	Package Type	Pump Model	Ram/Lift Model	Follower	Follower Description	Material
TP1265S51PF17AA2	55 Gallon Two Post Ram	AF1265S51PF17	RM552S-C	66517-1	Double Lip, Polyurethane	Aluminum
TP1265S51FF47AN2	55 Gallon Two Post Ram	AF1265S51FF47	RM552S-C	67196-2	Double Tube, EPR	Aluminum

RECOMMENDED ACCESSORIES



Extrusion Guns

651500 For material over 200,000 cP 3/8" (F) inlet
651533 For low- to medium-viscosity fluids 1/4" NPS (M) inlet



Extrusion Gun Nozzle Kits

66541-6 Orifice .063" (1.63 mm), **66541-9** Orifice .093" (2.36 mm),
66541-2 Orifice .125" (3.17 mm)



Swivel

636085 Straight, 3/8" (M) x 3/8" (F) / fabric with neoprene / 8,000 psi (552 bar) max. working pressure
636088 Z-360°, 3/8" (M) x 3/8" (F) / fabric with neoprene / 8,000 psi (552 bar) max. working pressure
75364 Straight, for use with 651533 gun / 1/4"-18 NPTF to 1/4"-18 NPSM / 10,000 psi (690 bar) max working pressure



Material Filters

1" F (2) inlet 3/8" F (3) outlet / 6,000 psi (414 bar) max. / Carbon Steel
651418-40-B for 40 Mesh (375 Microns)
651418-70-B for 70 Mesh (200 Microns)



3/4" Fluid Pressure Regulators

651780-C1B-B Regulated 750 – 2,500 psi (52 – 173 bar) / 6,000 psi (414 bar) max. inlet / carbon steel
651780-C1C-B Regulated 2,000 – 5,000 psi (138 – 345 bar) / 6,000 psi (414 bar) max. inlet / carbon steel
651780-C3B-B Regulated 750 – 2,500 psi (52 – 173 bar) / 6,000 psi (414 bar) max. inlet / stainless steel
651780-C3R-B Regulated 750 – 5,000 psi (52 – 345 bar) / 6,000 psi (414 bar) max. inlet / stainless steel

Other Accessories & Repair Kits

62274	Air Line Oil
96916	Standard Air Motor Muffler
66333-B	Wet-Sol (1 Quart)
66354-1	Stabilizing Bracket
637489	Universal Air Motor Service Kit
637491	55 Gallon Two Post Ram Repair Kit (RM552S-X)
67448	Cross Over Kit
67500	Low-Level Cut-Off Kit