


SALES AND ENGINEERING DATA

650934-XX3-C EXTRUSION PUMP

RATIO: SERIES:	2:1
FLUID PSIG: RANGE:	100 - 2400
RELEASED:	9-24-01
REVISED:	8-18-17
(REV: G)	S-1070

DIMENSIONAL DATA

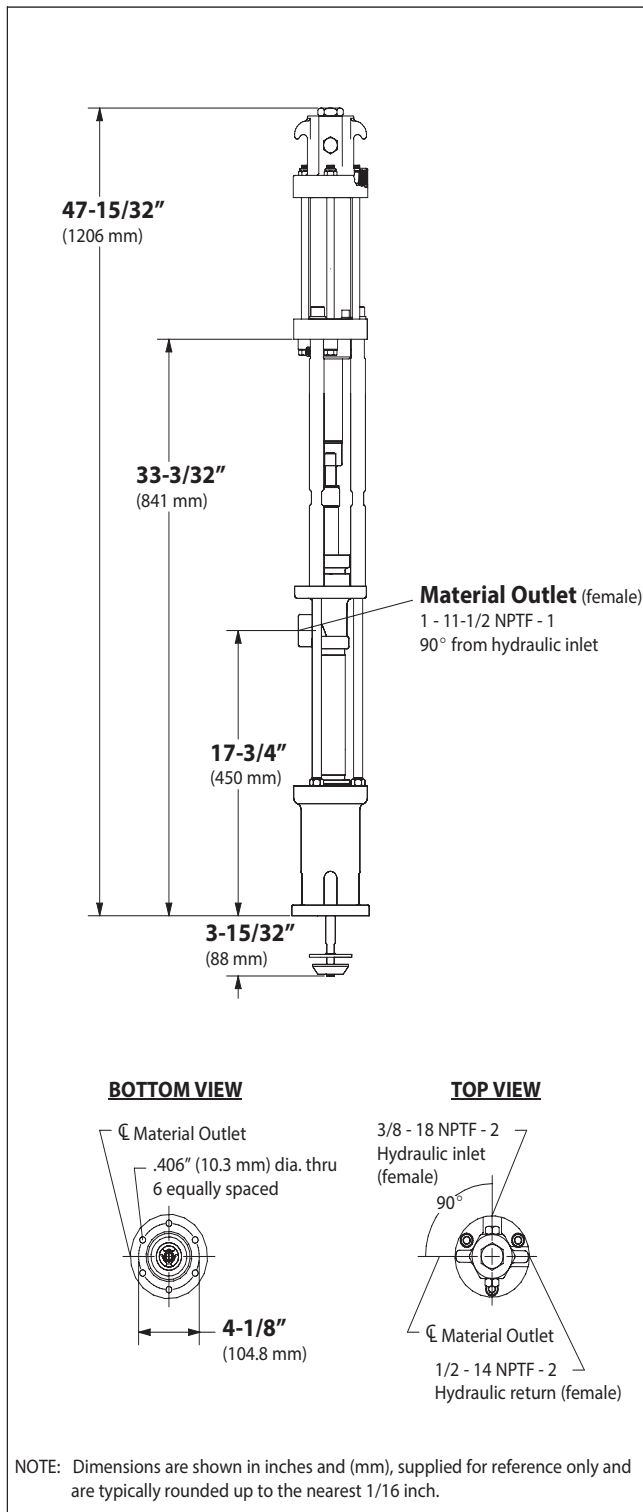

SPECIFICATIONS

CONSTRUCTION

Model Series (refer to option chart)	650934-XX3-C
Pump Type	Hydraulically Operated, Extrusion, Double Acting Pump
Ratio	2:1
Hydraulic Motor	67147-B
Motor Repair Kit	637449
Motor Size	2.062 sq." (13.3 sq. cm)
Stroke	6" (15.2 cm)
Hydraulic Inlet (female)	3/8 - 18 NPTF - 2
Hydraulic Return (female)	1/2 - 14 NPTF - 2
Lower Pump End Series	66243-XX3-B
Lower Pump Repair Kit	637071-X43-B
Packing Options:	

3 - Glass filled PTFE
C - UHMW-PE
G - UHMW-PE / Leather staggered
P - UHMW-PE / Glass filled PTFE staggered upper • UHMW-PE lower
R - Glass filled PTFE / UHMW-PE staggered upper • Glass filled PTFE lower

Material Outlet (female) 1 - 11-1/2 NPTF - 1

MATERIALS OF CONSTRUCTION

Outlet Body	Ductile Iron, Nickel plated
Cylinder	Carbon Steel, Nickel plated
Plunger	17-4 SS, Chrome plated
Upper Check	440 Stainless Steel
Upper Seat	440 Stainless Steel
Lower Check	440 Stainless Steel
Lower Seat	440 Stainless Steel
Inlet Body	Ductile Iron, Nickel plated
Weight	62.4 lbs (28.3 kgs)

PERFORMANCE

Hydraulic Inlet Pressure Range	50 - 1200 psig (3.4 - 82.8 bar)
Fluid Pressure Range	100 - 2400 psig (6.9 - 165.5 bar)
Required H-power @ 50 cpm	3.2 @ 1200 psig (82.8 bar)
Hydraulic flow required @ 50 cpm	4.9 gpm (18.5 lpm)
Maximum rec'd Cycles / Minute	50
Displacement Per Cycle	12.5 In ³ (205 cc)
Cycles Per Gallon	18.5
Flow @ 50 Cycles / Minute	2.7 gpm (10.2 lpm)
Noise Level	N / A
Maximum Temperature Limit	130° F (54° C)

ACCESSORIES:

61937-1 Wall Bracket
65138 Floor Mounting Flange

airpumping.co.uk


est. 1979

Unit 16, Upminster Trading Park, Warley St., Upminster, Essex, RM14 3PI, ENGLAND

ARO 


PERFORMANCE CURVES

PERFORMANCE BASED ON 30wt. OIL (100cSt) AT 40°C TEMPERATURE

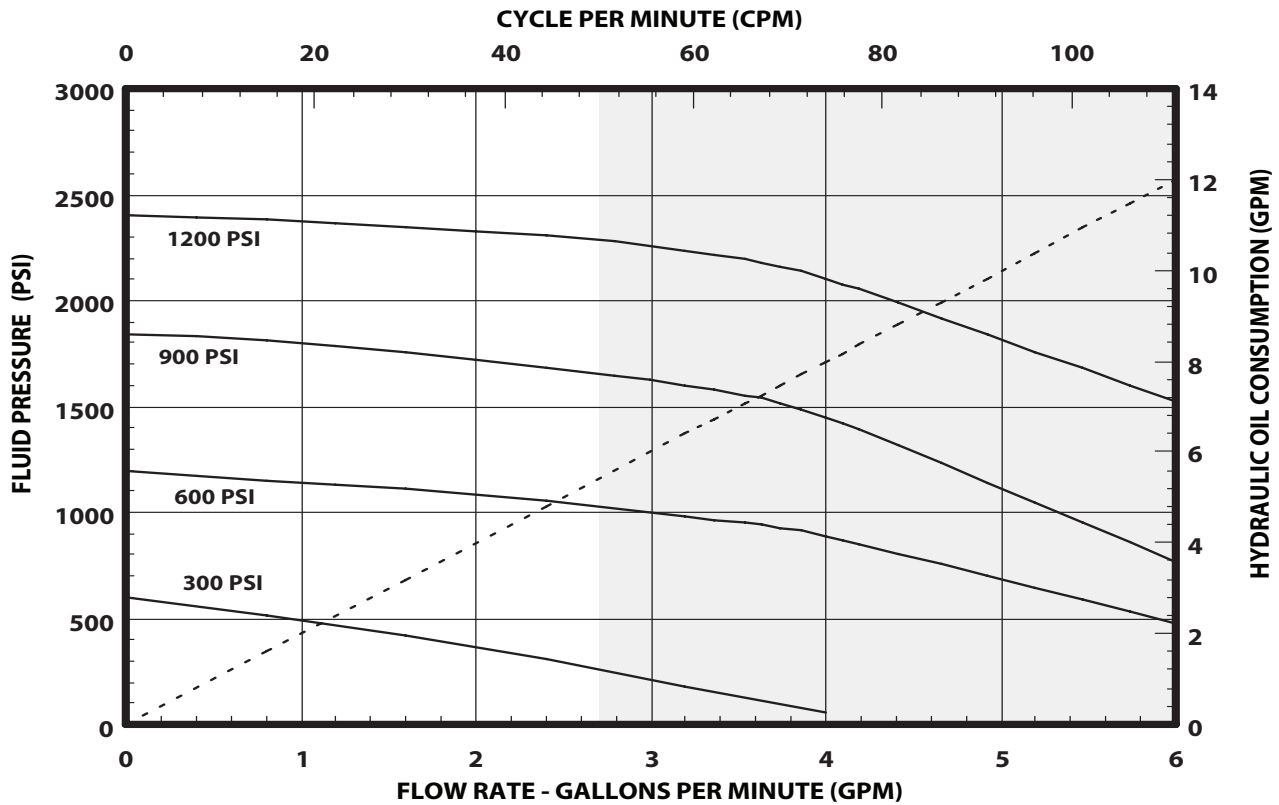

NOTE: NON SHADED AREA OF THE GRAPH REPRESENTS RECOMMENDED OPERATING RANGE

PERFORMANCE BASED ON 30wt. OIL (100cSt) AT 40°C TEMPERATURE

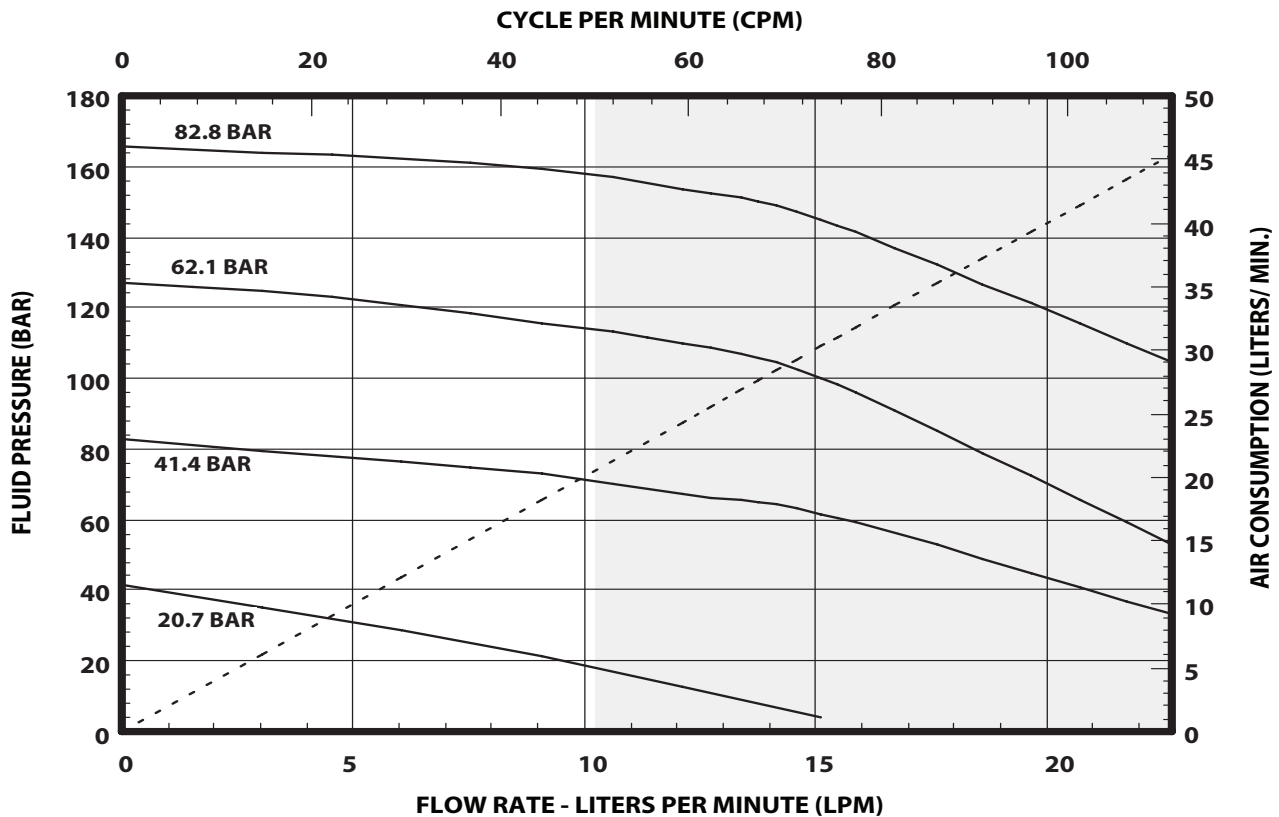

NOTE: NON SHADED AREA OF THE GRAPH REPRESENTS RECOMMENDED OPERATING RANGE